



Computerised Road network modelling using open street map sources in GIS: Basrah province as a case study

Ammar Jasim Dakhil

Affiliations

University of Basrah
College of Engineering
Civil Engineering Department
Basrah. Iraq

Correspondence

Ammar Jasim Dakhil
Department of Civil Engineering,
University of Basrah, Wasit, Iraq
Email: ammardakhil@uobasrah.edu.iq

Received

28-October-2021

Revised

08-December-2021

Accepted

10-January-2022

Doi: [10.31185/ejuow.Vol10.Iss1.269](https://doi.org/10.31185/ejuow.Vol10.Iss1.269)

Abstract

Information sources have developed considerably in recent years; many electronic platforms are able to provide valuable information regards engineering topics. One of the most important data sources is the open street map (OSM) platform, providing editable geographic information for most of the world, with different levels of accuracy and at different points in time. Road network mapping requires a high level of effort and accuracy, due to the complexity of the modelling and the amount of information that needs to be included in the feature class. OSM can support road network modelling by providing a different kind of data. In this paper, a systematic procedure was investigated for the production of an automated road network for Basrah city, as a case study for the use of OSM in Geographic Information System (GIS) 10.8 software. Specific spatial analysis tools such as road density and network analysis were also implemented. This study validated a computerised procedure to extract OSM data via two methods of validation and demonstrated the immediate applicability of this data for density and network analysis.

The research results show a significant reduction in time and effort required to produce an accurate Basrah city road network using OSM data sources. Density analysis and network analysis show the importance and validity of the produced road network.

Keywords: Road, Traffic, GIS, OSM, Automated, Procedure, Al Basrah.

الخلاصة: تم تطوير مصادر المعلومات بشكل كبير في السنوات الأخيرة. يمكن أن توفر الكثير من المنصات الإلكترونية معلومات قيمة فيما يتعلق بالموضوعات الهندسية. من أهم مصادر البيانات الجغرافية حالياً منصة خريطة الشارع المفتوحة (OSM) التي يمكن أن توفر معلومات جغرافية قابلة للتحرير لمعظم مناطق العالم بمستويات مختلفة من الدقة والتحديث. يتطلب رسم خرائط شبكة الطرق الكثير من الجهد والدقة نظراً لتعقيد النمذجة والكم الهائل من المعلومات التي يجب تضمينها في فئة الميزات. يمكن أن تدعم OSM نمذجة شبكة الطرق من خلال توفير نوع مختلف من البيانات. في هذا البحث، تم التحقيق في إجراء منهجي لإنتاج شبكة طرق مؤتمتة لمدينة البصرة كدراسة حالة باستخدام برنامج OSM في نظام المعلومات الجغرافية 10.8 (GIS). بالإضافة إلى ذلك، في هذه الدراسة، تم تنفيذ بعض أدوات التحليل المكاني مثل كثافة الطرق ومحلل الشبكة. تظهر نتائج البحث انخفاضاً كبيراً في الوقت والجهد لإنتاج شبكة طرق مدينة البصرة باستخدام مصادر بيانات OSM، كما يوضح تحليل الكثافة أهمية وصلاحيّة شبكة الطرق المنتجة.

1. INTRODUCTION

'Data source' as a term is difficult to define precisely, however, a definition commonly accepted by a wide range of scientists is 'The inhouse or digital site where data under inquiry is stored in a different kind of format such as books, tables, images, drawings, reports, etc.' [1]. Electronic data sources have undergone remarkable development in recent years, due to the rapid evolution of electronic storage capabilities [2]. These developments enabled many companies to offer a wide variety of electronic data, either for a fee or freely available. The availability of data can substantially reduce the efforts and costs that have previously been associated with the collection of these data from different physical sources [3]. However, the reliability of these data is still the primary challenge faced by any beneficiary using this information [1,4]; therefore, it is crucial to validate any open source data, especially if this data is intended to be used in scientific research.

Open Street Map (OSM), as a collaborative electronic geographic data source, was first made available online in 2004 in the United Kingdom by Steve Coast [5]. This non-commercial organization specialised in producing different types of information with georeferencing coordinates which can be used to produce paper or electronic maps [5,6]. This platform depends both on data gathered from high-resolution satellite images (see Figure 1) and on publicly-available government data. It offers four different types of data point feature class: polyline feature class, polygon feature class, relations (member), and metadata [7]. Despite being widely used around the world, OSM reliability is still variable from country to country, depending on the accuracy of the data gathered for certain places [8,9].

Zhao et al. (2014) studied the development of OSM road networks in the city of Beijing [10], describing OSM data as an important and qualified source of information for road networks in Beijing. Funke et al. (2015) proposed a method for automatic recognition of gaps in the road network using the OSM database [11]. Brovelli et al. (2017) developed an automated technique to assess the geometric accuracy of OSM data, in comparison to that of an authoritative road database [12]. Despite the success of this technique, its lengthy computational time means that its use is not practical for the slower internet speeds of Iraq. Keller et al. (2020) established and assessed an estimation framework for average speed in rural road networks constructed on a typical ML workflow and OSM road network data [13]. The proposed framework provided good evidence for the importance of extracting information from the OSM platform, however, its sole focus was speed data; OSM provides several forms of georeferenced data for Iraq (and, more specifically, Basrah city), such as roads, buildings, rivers, and green lands. Several inferences can be made from the extensive attempts of previous researchers to work with OSM data, including the fact that expensive software is required for data extraction in some forms of research; additionally, researchers working in an area where road network data is already available (e.g. Canada), would make no attempt to establish automated street map data in Basrah city and examine its validity. Geographic Information System (GIS) 10.8 has been implemented in this study as a key software to explore, investigate, analyse, and visualise georeferenced data. GIS provide great benefits via producing services in location scale and its simplicity empowers its users to implement spatial information and expressive data to make maps, tables, and diagrams. This software appropriately offers several examination tools such as topology, network analysis, route editing, data analysis tools and results display on high resolution updated map [14,15]. For all aforementioned benefits, GIS was implemented in this research as a tool for analysis and visualization.

As part of this research, an automated approach was investigated for the extraction of road data from OSM and the providing of an offline road feature class that can be used in GIS via statistical and network analysis. Actual measurements have been implemented to validate the information extracted from the OSM platform.

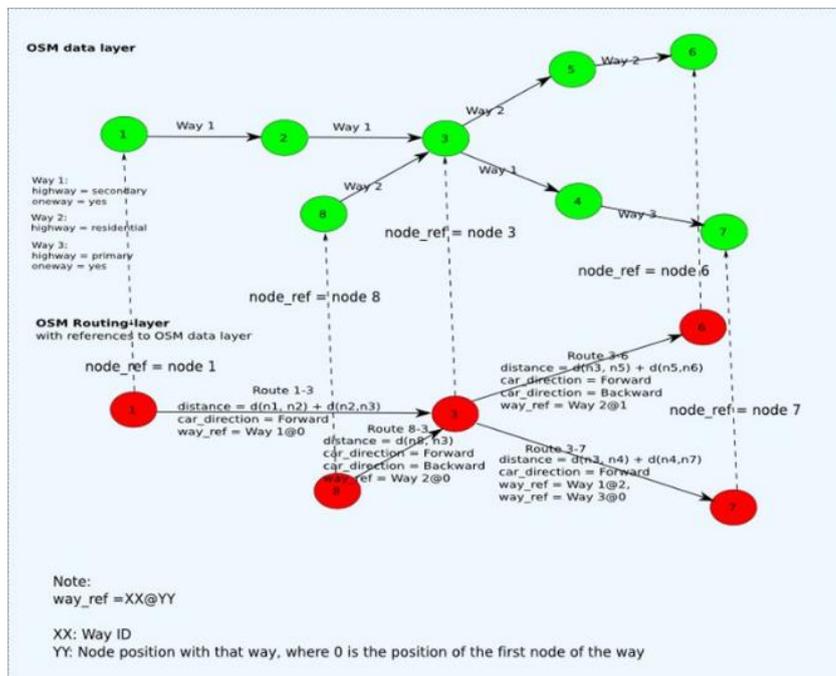


Figure 1 Data gathered from high-resolution satellite images

2. BASRAH ROADS DATA

Basrah city suffers from a lack of georeferenced information, such as infrastructure, and buildings. Despite the existence of a GIS department in each local authority in Basrah city, an accurate GIS map for the entire city still not available.

Modern development occurring in Iraq and in Basrah city has produced significant pressures for the road network, such that a traffic jam is a normal phenomenon for the local city road network (see Figure 2) [15]. Therefore, traffic management has become crucial for the solution of this problem. One of the key elements for traffic management is road data; this data is incomplete, thereby preventing any successful traffic management [16,17]. This research will extract most of the road network data using the information provided by OSM via the automated procedure.



Figure 2 Traffic jam in most of Iraq cities

3. AUTOMATED EXTRACTION PROCEDURE

Due to the availability of valuable georeferenced data regarding Basrah city in the OSM platform, it is crucial to investigate an automated procedure to extract these data to a standalone feature class that is used in the GIS analysis tool. This study implemented the computerised procedure explained in Figure 3.

It can be seen from the diagram that the extraction process contains several steps as follows:

- 1.** Activate GIS online server via ARC Catalog and load OSM platform, taking care to highlight the study area boundaries to avoid loading unnecessary data and slowing the process down.
- 2.** Build the extension and connection between GIS software and the OSM platform. This connection will enable GIS to identify the georeferenced data in terms of point, line, and polygon.
- 3.** Download the required data from the OSM platform, after recognising exactly what kind of data needs to be downloaded. This step is very important to avoid downloading data without a coordinate system.
- 4.** After the download is complete, extract the data into the required feature class or shapefiles via automated commands.
- 5.** View the extracted data on the ARC Map to start the validation process. If the extracted data meet the validation requirements, then it can be stored as a feature class. Otherwise, the extracted data are useless and it is better to find other data sources.
- 6.** Create the target feature class and start implementing statistical and network analysis.

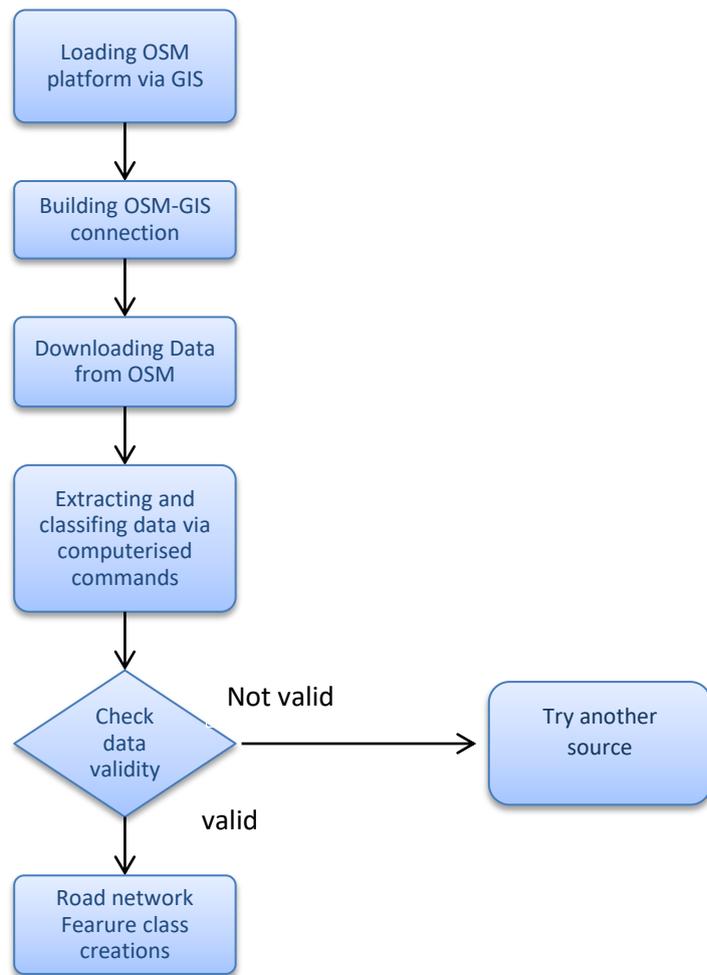


Figure 3 Computerised Road network creation procedure

4. STUDY AREA

This research will focus only on the Basrah City centre, as a case study. The area is located between latitudes $30^{\circ}24' N$ and $30^{\circ}36' N$ and longitudes $47^{\circ} 43' E$ and $47^{\circ}53' E$ as shown in Figure 4.

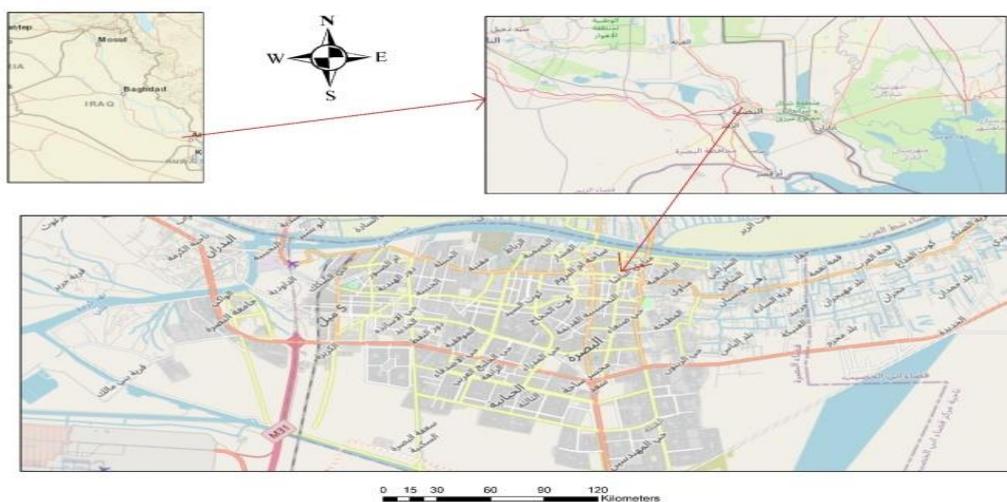


Figure 4 study area boundaries.

5. RESULTS AND DISCUSSION

5.1. Downloading Barash roads from OSM

After implementing the aforementioned computerised procedure, the Basrah Road network can be downloaded from the OSM platform for specified boundaries. The results of downloading the road network are shown in Figures 5 and 6.

From the Figures above its can be seen that the first data extracted contain all types of feature classes (Point, Line and Polygon) which represent different types of facilities and land use in Basrah city. However, the road network is the sole focus of this study, therefore is crucial to recognise only roads and separate them into a single layer. Due to the similarity of the shape of the roads to other structures like canals, road characteristics such as direction and speed limit were implemented to establish an inquiry that illustrated only road features.

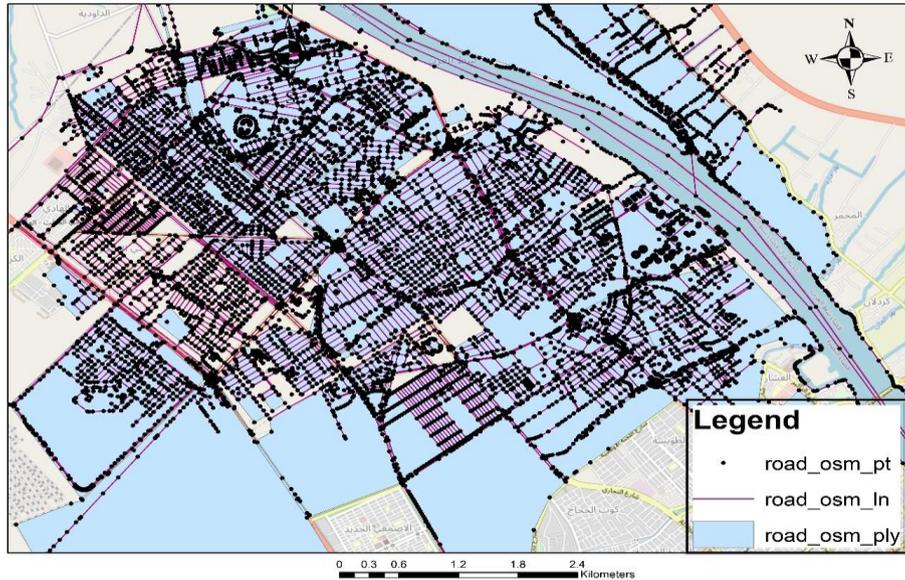


Figure 5 Row data extraction



Figure 6 Recognised Road network only.

5.2. Validating the extracted information.

As mentioned previously it is vital to validate the extracted information before running any kind of analysis. This study implemented two types of validation as follows:

a) Manual Modelling

The researcher manually modelled small district samples and compared the result with the extraction information from the OSM platform as shown in Figure 7. The green line represents manual modeling and the purple line signifies computerised modelling. It can be concluded that the matching is nearly 99% between the two methods. However, some road extracted from OSM does not exist in a real road network, as illustrated with red circles. This emphasises the importance of validating the extracted network.

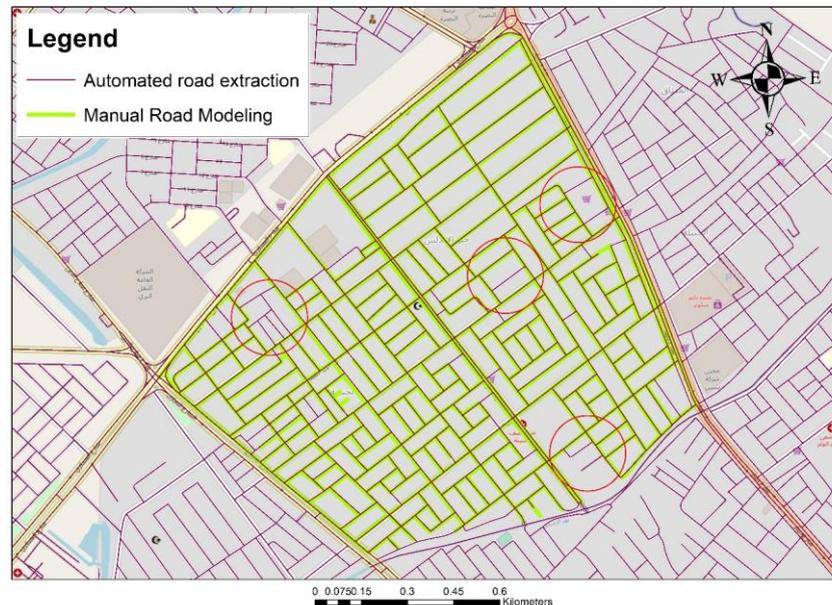


Figure 7 Manual vs computerised modelling.

b) Measurement validation

The second step of validating data is comparing the road properties that are extracted automatically with the actual road characters such as length, width, direction, road name. Length and width properties are implemented as a unit of justification in this research. It has been found that the measurements are quite accurate and can be used to run the analysis. The main reason for this is that the OSM platform depends on high-resolution satellite images to extract this physical information, therefore it can be considered to be reliable information. However, it has been found that other data, such as road names, need to be validated one-by-one according to local information.

c) Topology validation

Topology is one of the GIS software tools that is used to validate the feature class information. It can be seen in Figure 8 that the topology analysis has returned zero errors regarding the 'Must Not Overlap' rule.

All validation methods mentioned above illustrate that the extracted information is reliable and can be used for network work analysis and any further traffic management analysis.

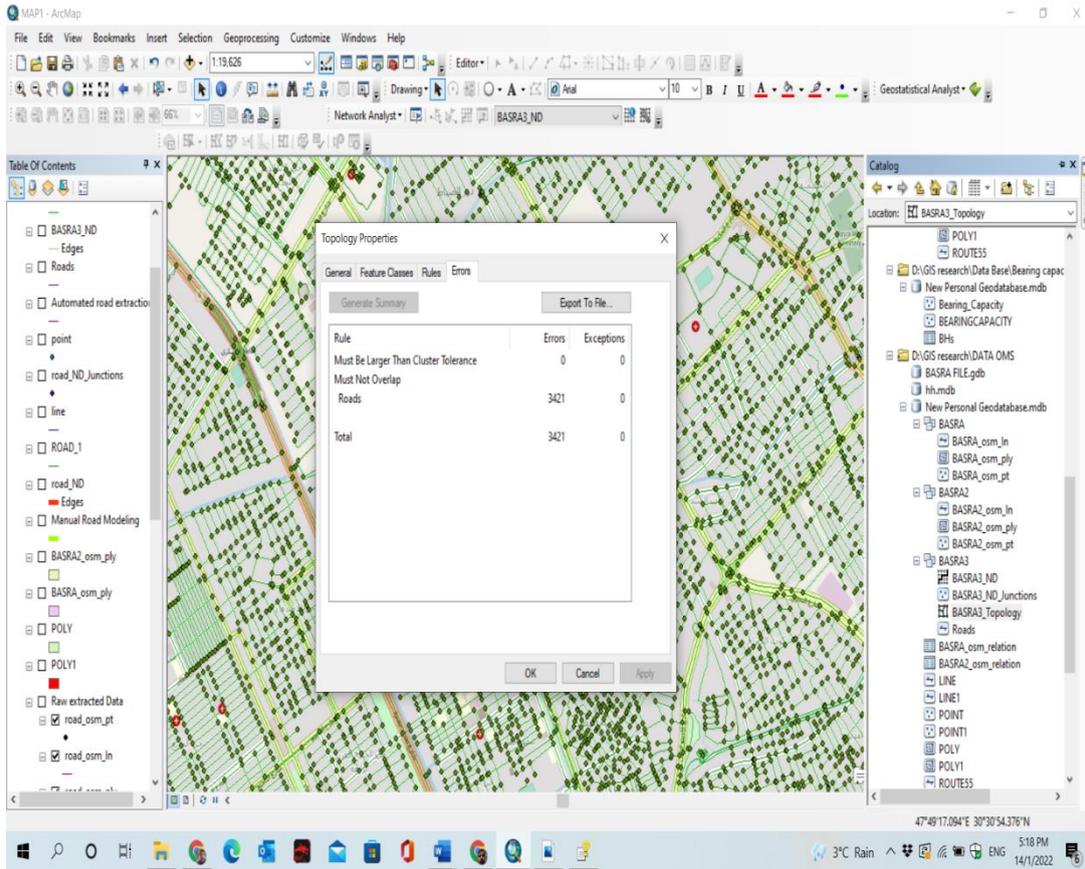


Figure 8 Topology validation results

5.3. GIS analysis

Given that the data extracted from OSM is considered to be highly accurate, statistical analysis can be done with a significant level of confidence. Three kinds of analysis have been performed on the extracted data inside GIS software, as follows:

A) Density analysis

This kind of analysis considers identified quantities of some singularity and spreads them across the landscape, grounded by the quantity that is calculated at each position and the unique connection of the positions of the measured quantities [18]. This kind of analysis shows where the road network is concentrated. This information will be highly important to decision-makers in any future road planning [19]. Figure 9 shows the density analysis for Basrah city centre. From the analysis, it can be seen that network length from 3800 m to 4300 m is coloured blue and located in the middle of Basrah city; this area will require special attention in future planning. The low-density area with a network reach of 500 m is coloured with yellow, representing most of the city center boundary. These areas are expected to be able to absorb any future road plans, including ring roads.

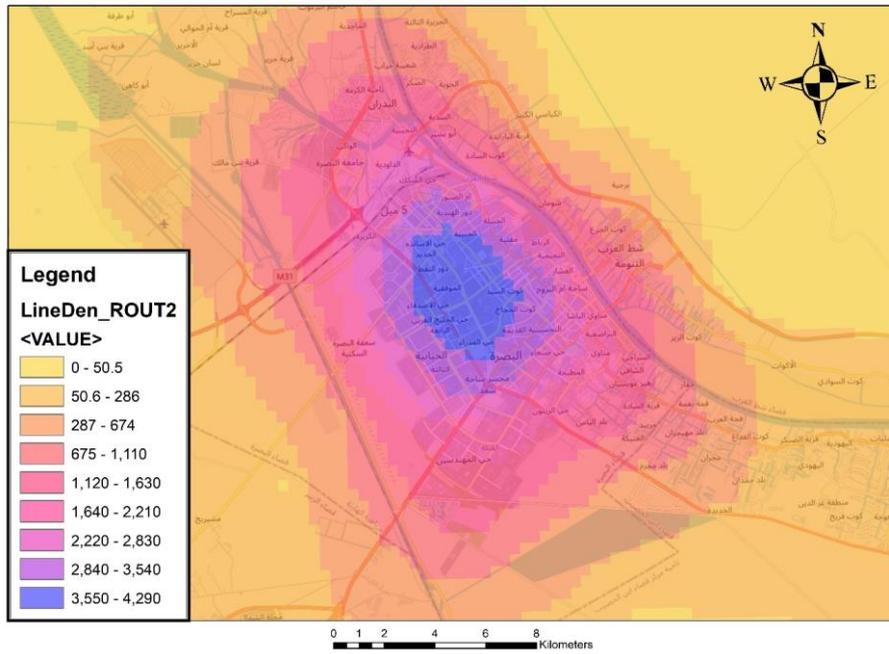


Figure 9 Road density analysis for Basrah city

B) Network Analysis

Network analysis is a GIS analysis tools that is especially applicable to the road network. Network analysis studies the characteristics of the actual and virtual networks, to observe the performance of flows within and around such networks and locational analysis [20]. It implements the methodology of edge-node topology to demonstrate the actual live networks of information. It can be classified into five types of analysis: new route, closet facility, shortest route, services area, and cost matrix [21]. These types of analysis depend on the availability of different types of information in the road feature class. The extracted road feature class from OSM has only length data that can be used directly without any correction or modification. Therefore, only one type of analysis can be performed using network analysis as shown in Figure 10. This analysis can only distinguish between roads and junctions and classify them in the different feature classes. Despite the limitation of using network analysis on extracted information, the production of junctions and roads in separated feature classes can save a considerable amount of manual modelling work.



Figure 10 Road and junctions representation using network analysis in GIS

6. CONCLUSIONS

Based on the data collection and analysis by using the investigated computerised approach, several key points can be concluded as follows:

1. The OSM provides valuable data that can be used for traffic management in Basrah City.
2. The computerised approach achieved its aim by extracting online information from the OSM platform to an independent feature class that can be used offline in GIS software.
3. The physical information gathered from OSM such as road length and width show a high level of accuracy and can be used for to run further analysis. Other information related to the name and direction needs to be viewed again for manual validation.
4. A limited type of analysis such as density and road and junction analysis can be done on the data extracted from OSM due to limitations in information reliability.
5. Despite the limitation in analysis capacity, the information extracted can save significant time and effort by reducing manual modelling.

FUTURE WORK

Further studies need to be done to use OSM data sources to extract other facilities such as buildings and urban areas.

ACKNOWLEDGEMENTS

The author received no kind of fund to produce this research.

REFERENCES

1. Obe, R. O., & Hsu, L. S. (2017). PostgreSQL: Up and Running: a Practical Guide to the Advanced Open Source Database. *O'Reilly Media*, Inc.
2. Zhang, Y., Mesaros, A., Fujita, K., Edkins, S. D., Hamidian, M. H., Ch'ng, K., ... & Kim, E. A. (2019). Machine learning in electronic-quantum-matter imaging experiments. *Nature*, **570**(7762), 484-490.
3. Gunadi, G. (2019). Qualitative system dynamics modelling of the impacts of maintenance, effort, competence and collaboration on e-government website availability. *Electronic Government, an International Journal*, **15**(2): 189-212.
4. Weber, D., Nasim, M., Mitchell, L., & Falzon, L. (2020, December). A method to evaluate the reliability of social media data for social network analysis. In *2020 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM)*: 317-321, IEEE.
5. Mooney, P., & Minghini, M. (2017). A review of OpenStreetMap data.
6. Herfort, B., Lautenbach, S., de Albuquerque, J. P., Anderson, J., & Zipf, A. (2021). The evolution of humanitarian mapping within the OpenStreetMap community. *Scientific reports*, **11**(1): 1-15.
7. WIKI, (2019) OSM Routing Data Layer. Available at: https://wiki.openstreetmap.org/wiki/OSM_Routing_Data_Layer (Accessed: November 2021).
8. Sehra, S. S., Singh, J., & Rai, H. S. (2017). Assessing OpenStreetMap data using intrinsic quality indicators: an extension to the QGIS processing toolbox. *Future Internet*, **9**(2), 15.
9. Yagoub, M. M. (2017). Assessment of OpenStreetMap (OSM) Data: The Case of Abu Dhabi City, United Arab Emirates. *Journal of Map & Geography Libraries*, **13**(3):300-319.
10. Zhao, P., Jia, T., Qin, K., Shan, J., & Jiao, C. (2015). Statistical analysis on the evolution of OpenStreetMap road networks in Beijing. *Physica A: Statistical Mechanics and its Applications*, **420**:59-72.
11. Funke, S., Schirrmeister, R., & Storandt, S. (2015, July). Automatic extrapolation of missing road network data in OpenStreetMap. In *Proceedings of the 2nd International Conference on Mining Urban Data-Volume 1392* :27-35.

12. Brovelli, M. A., Minghini, M., Molinari, M., & Mooney, P. (2017). Towards an automated comparison of OpenStreetMap with authoritative road datasets. *Transactions in GIS*, **21**(2), 191-206.
13. Keller, S., Gabriel, R., & Guth, J. (2020). Machine learning framework for the estimation of average speed in rural road networks with OpenStreetMap data. *ISPRS International Journal of Geo-Information*, **9**(11), 638.
14. Ahmadi, M., Valinejadi, A., Goodarzi, A., Safari, A., Hemmat, M., Majdabadi, H. A., & Mohammadi, A. (2017). Geographic information system (GIS) capabilities in traffic accident information management: a qualitative approach. *Electronic physician*, **9**(6), 4533.
15. Causevic, S., Deljanin, A., Begovic, M., & Deljanin, E. (2018, May). Potentials and advantages of applying geographic information systems in various fields of traffic engineering. In *CETRA'18, 5th International Conference on Road and Rail Infrastructure* (1285).
16. Albayati, A. H., & Ramadan, Z. A. (2021). The effects of speed and flow characteristics on crash rates for Wasit multi-lane highways in Iraq. *Wasit journal of engineering sciences*, **9**(1):22-36.
17. Abdulwahab, A. M., Ismael, N. T., & Al-Nuaimi, S. F. (2018, October). Institutional Framework Sustainable Transportation for Iraq. In *2018 International Conference on Advanced Science and Engineering (ICOASE)* (485-490). IEEE.
18. Shafabakhsh, G. A., Famili, A., & Bahadori, M. S. (2017). GIS-based spatial analysis of urban traffic accidents: Case study in Mashhad, Iran. *Journal of traffic and transportation engineering (English edition)*, **4**(3): 290-299.
19. Ma, Q., Huang, G., & Tang, X. (2021). GIS-based analysis of spatial–temporal correlations of urban traffic accidents. *European Transport Research Review*, **13**(1):1-11.
20. Ahmed, S., Ibrahim, R. F., & Hefny, H. A. (2017). GIS-based network analysis for the roads network of the Greater Cairo area. In *Proc. of 2nd International Conference on Applied Research in Computer Science and Engineering*.
21. Sushma, M. B., & Reddy, V. (2021). Finding an optimal path with hospital information system using GIS-based Network analysis. *WSEAS Transactions on Information Science and Applications*, **18**, 1-6.